




## OPEN SPRING MOUNT

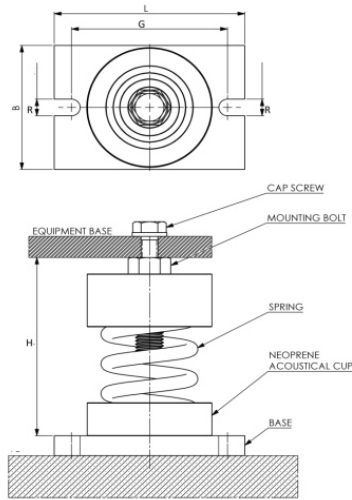

### FEATURES AND BENEFITS.

<b>Description:-</b>	<ul style="list-style-type: none"> <li>* Open Spring Mount are used to isolate both noise and vibration from floor mounting equipments.</li> <li>* Pumps, packaged air handling units, air conditioning units, centrifugal and axial fans, inertia bases etc.</li> <li>* Outer diameter equal to at least 85% of working height.</li> <li>* Neoprene top and bottom with non-skid bolt down base.</li> <li>* Springs designed for 50% overload capacity.</li> <li>* Plated levelling / lock bolt.</li> </ul>
<b>Special:-</b>	<ul style="list-style-type: none"> <li>* Designed to meet BS1726, class.</li> <li>* Springs powder coated.</li> </ul>

Product Code	Load Range (kg)	Nominal Deflection (mm)
KLOSM25	30-2300	25
KLOSM50	510-1300	50

Product Code	Deflection mm	Max Load (N)
HGOSM 25/10	25	100
HGOSM 25/15	25	150
HGOSM 25/20	25	200
HGOSM 25/30	25	300
HGOSM 25/40	25	400
HGOSM 25/60	25	600
HGOSM 25/100	25	1000
HGOSM 25/160	25	1600
HGOSM 25/200	25	2000
HGOSM 25/250	25	2500
HGOSM 25/300	25	3000
HGOSM 25/400	25	4000
HGOSM 25/500	25	5000
HGOSM 25/600	25	6000
HGOSM 25/800	25	8000
HGOSM 25/1050	25	10500
HGOSM 25/1250	25	12500

Product Code	Deflection mm	Max Load (N)
HGOSM 50/10	50	100
HGOSM 50/15	50	150
HGOSM 50/20	50	200
HGOSM 50/30	50	300
HGOSM 50/40	50	400
HGOSM 50/60	50	600
HGOSM 50/100	50	1000
HGOSM 50/160	50	1600
HGOSM 50/200	50	2000
HGOSM 50/250	50	2500
HGOSM 50/300	50	3000
HGOSM 50/400	50	4000
HGOSM 50/500	50	5000
HGOSM 50/600	50	6000
HGOSM 50/800	50	8000
HGOSM 50/1050	50	10500
HGOSM 50/1250	50	12500

- NOTE:-**
1. DUE TO POLICY OF CONTINUAL IMPROVEMENT, THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
  2. MEASUREMENT ARE SUBJECT TO 5% TOLERANCE.
  3. TO ACHIEVE GOOD SOUND SUPPRESSIONS DO NOT LOAD FITTING.

