




OFFSET CLAMP

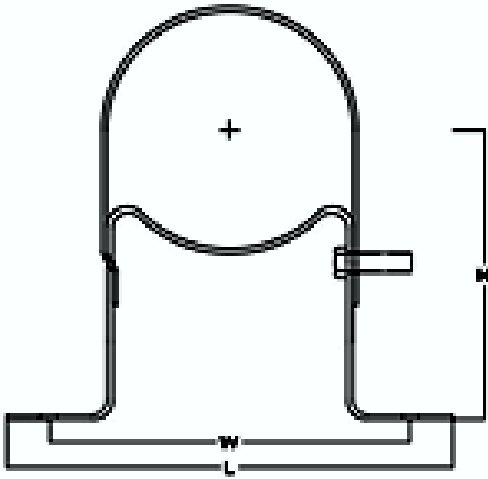

FEATURES AND BENEFITS.

Description:-	<ul style="list-style-type: none"> * Recommended for support of pipe lines running at a definite distance from the wall or structure. * Used where removing and installing of pipe is done periodically.
Material:-	Steel, other materials on request.
Special:-	<ul style="list-style-type: none"> * Electro galvanized as per ASTM B 633. * Designed to meet MSS Standard SP-58, type 24 and SP-69.

Product Code	Nominal Pipe Size		Pipe OD (D) mm	(L) mm	(W) mm	(H) mm	Bolt Size	Microns (μ)	Max Load (N)
	In.	mm							
HGEPOC028	¾"	DN20	26.7	87	57	83	M8	8 - 15	834
HGEPOC034	1"	DN25	33.4	94	64	83	M8	8 - 15	834
HGEPOC042	1 ¼"	DN32	42.1	102	72	83	M8	8 - 15	834
HGEPOC048	1 ½"	DN40	48.2	108	78	83	M8	8 - 15	1079
HGEPOC054	54 MM	-	54	114	84	83	M8	8 - 15	1128
HGEPOC060	2"	DN50	60.3	120	90	83	M8	8 - 15	1472
HGEPOC073	2 ½"	DN65	73	133	103	113	M8	8 - 15	1766
HGEPOC083	83 MM	-	83	143	113	113	M8	8 - 15	1864
HGEPOC090	3"	DN80	88.9	150	120	113	M8	8 - 15	1962
HGEPOC110	110 MM	-	110	170	140	113	M8	8 - 15	2109
HGEPOC114	4"	DN100	114.3	174	144	113	M8	8 - 15	2453
HGEPOC141	5"	DN125	141.3	201	171	138	M10	8 - 15	2943
HGEPOC160	160 MM	-	160	220	190	138	M10	8 - 15	3434
HGEPOC141	6"	DN150	168.3	228	198	138	M10	8 - 15	3679
HGEPOC219	8"	DN50	60.3	279	249	168	M12	8 - 15	3924

NOTE:- 1. CUSTOMIZED DIMENSIONS AVAILABLE ON REQUEST.

