




SLIDING PIPE SUPPORT

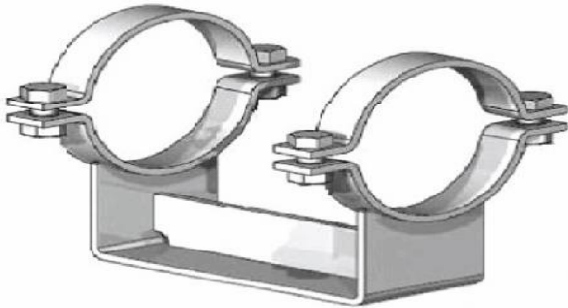

FEATURES AND BENEFITS.

Material:-	Mild Steel, other material on request
Special:-	* Galvanized ASTM A 123 / A 123M * Temperature resistance up to 300 °C

Product Code	Nominal Pipe Size		PIPE OD (mm)	Insulation Thickness (mm)	Outside Diameter (mm)	Width (mm)	Thickness (mm)	Height (mm)	Length of Guide (mm)	Hole Diameter (mm)	Max Load (N)
	In.	mm									
HGEPSPS219	8"	DN200	219.1		219.1	50	8	107	290	M 16	29000
HGEP32SPS219	----	DN200		32 MM	283.1	50	8	107	290	M 16	29000
HGEP50SPS219	----	DN200		50 MM	319.1	50	8	142	290	M 16	29000
HGEPSPS250	10"	DN250	273.1	-	273.1	50	8	107	290	M 16	29000
HGEP32SPS273	----	DN250		32 MM	337.1	50	8	107	290	M 16	29000
HGEP50SPS273	----	DN250		50 MM	373.1	50	8	142	290	M 16	29000
HGEPSPS324	12"	DN300	323.8	-	323.8	50	8	107	290	M 16	29000
HGEP32SPS324	----	DN300		32 MM	387.8	60	8	107	290	M 16	34000
HGEP50SPS324	----	DN300		50 MM	423.8	60	8	142	290	M 16	34000
HGEPSPS356	14"	DN350	355.6	-	355.6	60	8	142	290	M 16	34000
HGEP32SPS356	----	DN350		32 MM	419.6	60	8	142	290	M 16	34000
HGEP50SPS356	----	DN350		50 MM	455.6	60	8	192	290	M 16	34000
HGEPSPS406	16"	DN400	406.4	-	406.4	60	8	142	290	M 16	34000
HGEP32SPS406	----	DN400		32 MM	470.4	60	8	142	290	M 16	34000
HGEP50SPS406	----	DN400		50 MM	506.4	60	8	192	290	M 16	34000
HGEPSPS457	18"	DN450	457.2	-	457.2	60	8	142	290	M 16	34000
HGEP32SPS457	----	DN450		32 MM	521.2	75	10	142	290	M 16	44000
HGEP50SPS457	----	DN450		50 MM	557.2	75	10	192	290	M 16	44000
HGEPSPS508	20"	DN500	508	-	508	75	10	142	290	M 16	44000
HGEP32SPS508	----	DN500		32 MM	572	75	10	142	290	M 16	44000
HGEP50SPS508	----	DN500		50 MM	608	75	10	192	290	M 16	44000
HGEPSPS610	24"	DN600	609.6	-	609.6	75	10	142	290	M 16	44000
HGEP32SPS610	----	DN600		32 MM	673.6	75	10	142	290	M 16	44000
HGEP50SPS610	----	DN600		50 MM	709.6	75	10	192	290	M 16	44000

NOTE:- 1. OTHER DIMENSIONS AVAILABLE ON REQUEST.

2. a. EP - MICRONS : 8μ - 15μ
- b. HDG - MICRONS : 70μ - 95μ

