




UL LISTED UNIVERSAL BEAM CLAMP

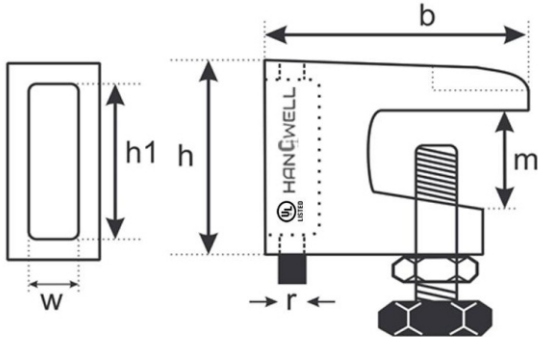

FEATURES AND BENEFITS.

Coating Specification:	* Minimum 8+ micron Electro-galvanized zinc plating.
Dimensional Tolerance :	* All Dimensions are as per Table LBM-01 unless otherwise specified. * For dimensions not specified: $\pm 3\%$.
Material Specification:	Malleable Iron, ASTM A47 Grade 32510 SG Iron, Ductile Iron & all Equivalent Grades.

Table No LBM-01. Universal Beam Clamp Specification

Product Code	Size mm	Rod (R) mm	$b \pm 5.0$ mm	$m \pm 5.0$ mm	$h1 \pm 5.0$ mm	$w \pm 3.0$ mm	Height (H) ± 5.0 mm	Remarks	Maximum Load (N)
FG-LBM-10	UPTO 4"	M10	50	26.5	30	12	46	Can be used for Top and Bottom Position	6672

