




## DROP IN ANCHOR

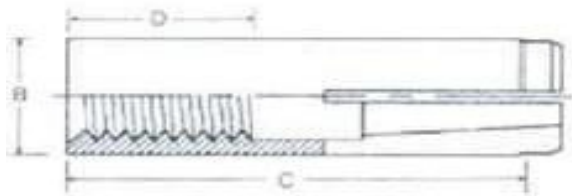

### FEATURES AND BENEFITS.

<b>Description:-</b>	<ul style="list-style-type: none"> <li>* Medium load fixings. Anchor placement flush with the surface or deeper. Fixture detachable anytime.</li> <li>* Flexible in fixture thickness with variety sizes of hexagonal bolts suitable for anchoring intension zone.</li> <li>* Ideal for suspended type of fixtures such as pipings, air ducts, cable tray and trunkings.</li> <li>* Machine installation: mechanical pumps, genset and electrical switch gear.</li> <li>* Temporary work such as steel truss for platform, wooden form structures and safety.</li> <li>* Securing of pipe brackets, rails and base plates.</li> </ul>
<b>Material:-</b>	Steel, other materials on request.
<b>Special:-</b>	* Electro galvanized as per ASTM B 633.

Product Code	Size (mm)	Anchor Length © (mm)	Thread Length (D) (mm)	Drilled Hole Diameter (B) (mm)	Minimum Hole Depth (mm)	Effective Depth (mm)	Minimum Concrete Thickness (mm)	Fixture Hole Diameter (mm)	Permissible Load (KN)	Box Quantity
<b>Metric Size</b>										
HLEPDPA06	M6	25	10	8	30	25	60	7	1.00	1500
HLEPDPA08	M8	30	13	10	35	30	70	9	2.00	1200
HLEPDPA10	M10	40	16	12	45	40	80	12	3.00	1000
HLEPDPA12	M12	50	21	6	55	50	100	14	4.00	800
HLEPDPA16	M16	60	30	20	70	60	130	18	5.00	500
HLEPDPA20	M20	80	35	25	90	80	160	22	6.00	250

<b>Imperial Size</b>										
HLEPDPA14	1/4"	25	10	8	30	25	60	7	1	1500
HLEPDPA516	5/16"	30	13	10	35	30	70	9	2	1200
HLEPDPA38	3/8"	40	16	12	45	40	80	12	3	1000
HLEPDPA012	1/2"	50	21	6	55	50	100	14	4	800
HLEPDPA58	5/8"	60	30	20	70	60	130	18	5	500
HLEPDPA34	3/4"	80	35	25	90	80	160	22	6	250

NOTE:- 1. OTHER FINISHES AVAILABLE ON REQUEST.

